


MRL

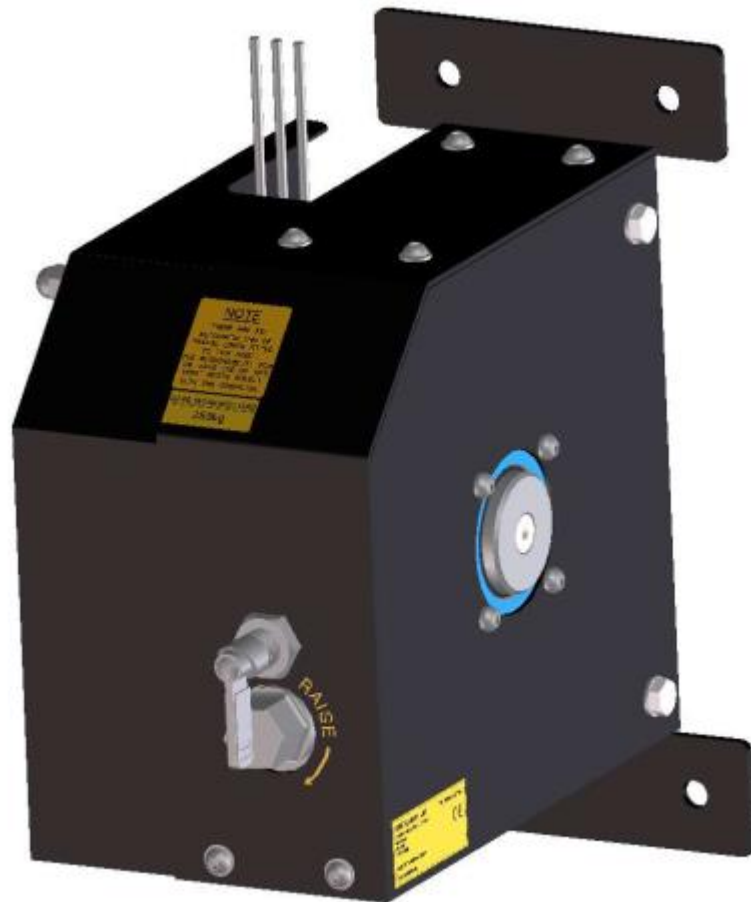

250 kg capacity, 3 line, drill operated hoist

Notes:

1. Average lifting speed: 4 metres/minute
2. Ratio 80:1
3. Rope dia: 5mm
4. Max lift cap: 8m
5. Safety factor assuming load supported on 2 lines only: 13.1:1
6. At lowest position of load, there must be at least 2 layers of steel wire rope still on drum.